


iQ500, Gas Hob, 60 cm, Stainless steel
EC6A5HI90

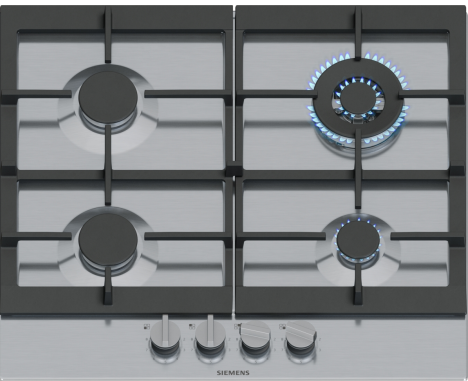

HZ32WA00 wireless roastingSensor

Stainless steel gas hob with stepFlame Technology for precise flame control, detachable knobs and continuous pan supports for easy cleaning.

- ✓ stepFlame-technologie: pas de vlam nauwkeurig aan met negen verschillende standen
- ✓ Detachable metallic sword knobs: Easily removable for easy cleaning and precise cooking control
- ✓ Continuous cast iron pan support: High firmness and stability for cookware
- ✓ Wok burner 3,5 kW: Go from simmer to stir-fry on one burner
- ✓ Timeless stainless steel surface

Product name/family: gas hob w
integrated controls
Design: Built-in
Type of heating: Gas
Total number of positions that can be used at the same time: 4
Required niche size for installation (HxWxD):45 x 560-560 x
480-490 mm
Width of the appliance:582 mm
Dimensions: 45x582x520 mm
Dimensions of the packed product (HxWxD):150x650x580 mm
Net weight: 11.3 kg
Gross weight: 12.4 kg
Residual heat indicator: No
Location of control panel: Front
Basic surface material: Stainless steel
Color of surface: Stainless steel
Length electrical supply cord: 100 cm
EAN code:4242003949207
Gas connection rating: 8000 W
Fuse protection:3 A
Voltage:220-240 V
Frequency:50; 60 Hz



iQ500, Gas Hob, 60 cm, Stainless steel EC6A5HI90

Design

- Stainless steel surface
- cast iron pan support
- full metal

Comfort & Convenience

- step valve 9 steps: precisely adjust the flame in nine defined and repeatable levels.
- Sword Knobs, front: easily access knobs in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the knob to ignite the flame.

Burners and power

- 4 PC
- Left front: Standard burner up to 1.75 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Right rear: WOK burner up to 3.5 KW (depending on gas type)
- Right front: Economy burner up to 1 KW (depending on gas type)

Cleaning

- detachable for easy cleaning between knobs.
- yes for easy cleaning.

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 51.5 x 582 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 490)
- Min. worktop thickness: 20 mm
- Power cord: 1 m
- Connected load: 8 KW

iQ500, Gas Hob, 60 cm, Stainless steel
EC6A5HI90

