


Series 8, Induction Hob, 90 cm, surface mount with frame PIV975DC1E

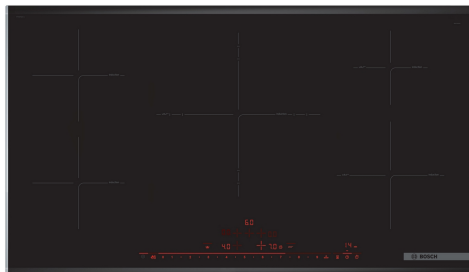

HEZ32WA00 Wireless food thermometer
HEZ394301 Connecting strip

The induction hob with PerfectFry: achieve perfect frying results thanks to automatic temperature control.

- **DirectSelect Premium:** direct, simple selection of the desired cooking zone, power and additional functions.
- **PerfectFry:** no more worries about scorching.
- **Power Boost:** up to 35% faster heating compared to highest power level.
- **Restart:** restores hob settings in case of an unintentional hob switch-off.
- **Timer with switch-off function:** turns off the assigned cooking zone after the set time.


Product name/family: Cooking zone ceramic
Built-in / Free-standing: Built-in
Energy input: Electric
Total number of positions that can be used at the same time: 5
Required niche size for installation (HxWxD): 51 x 880-880 x 490-500 mm
Width of the appliance: 916 mm
Dimensions: 51x916x527 mm
Dimensions of the packed product (HxWxD): 126x1073x603 mm
Net weight: 20.8 kg
Gross weight: 22.5 kg
Residual heat indicator: yes
Location of control panel: Front
Basic surface material: Ceramic
Color of surface: Black, Alu, brushed
Length electrical supply cord: 110 cm
EAN code: 4242002838854
Voltage: 220-240 V
Frequency: 50; 60 Hz



4 242002 838854

Series 8, Induction Hob, 90 cm, surface mount with frame PIV975DC1E


measurements in mm




- A:** Minimum distance from the hob cut-out to the wall;
B: Recessed depth
C: The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm. See space requirements for the oven.

The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if required.

D	E	F
585-600	50	≥ 35
> 600	≥ 50	≥ 50

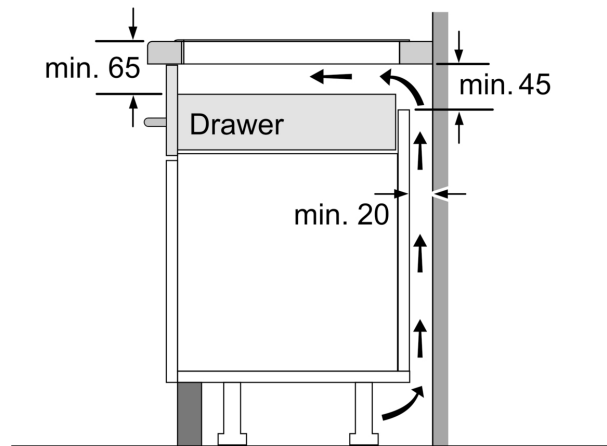

Measurements in mm

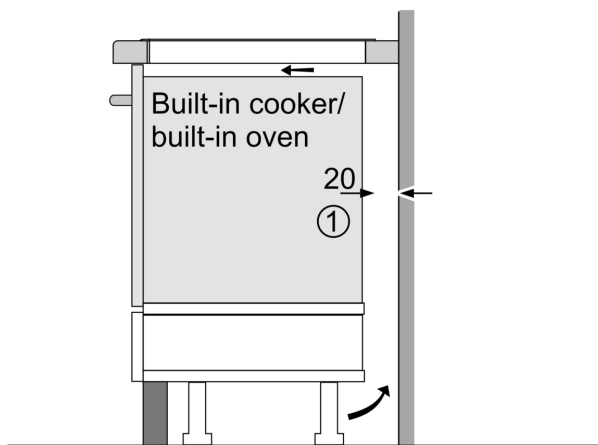

- ①
Ventilation gap must be present.

Measurements in mm

